

SensorSAFE[™] infrared dispense option



SensorSAFE not recommended for use with clear containers or for applications in direct sunlight

Ice and water dispensers, 115 V/60 Hz				
lce storage capacity	Dispense	lce machine cooling	Item number	
25 lb (11.4 kg)	Lever	air	25CI425A-L	
		water	25CI425W-L	
	SensorSAFE	air	25CI425A-S	
		water	25CI425W-S	
50 lb (22.7 kg)	Lever	air	50CI425A-L	
		water	50CI425W-L	
	SensorSAFE	air	50CI425A-S	
		water	50CI425W-S	

Ice-only available, add -I

Example: 25CI425A-LI

Ice production			
Temperatures air/water	70/50 F (21/10 C)	90/70 F (32/21 C)	
Air-cooled	425 lb (193.0 kg)	325 lb (147.6 kg)	
Water-cooled	486 lb (220.6 kg)	408 lb (185.2 kg)	
Energy consumption per 100 lb (45.4 kg) ice	N/A	6.0 kWh air-cooled 4.3 kWh water-cooled	
Condenser water consumption	N/A	0.5 gpm (1.9 Lpm) at 70 F (21 C) water	
Water consumption	12.0 gal (45.4 L) of potable water per 100 lb (45.4 kg) of ice		

Symphony Plus[™] ice and water dispenser

25 & 50 CI series countertop with Chewblet° ice machine

Features

25 or 50 lb (11.4 or 22.7 kg) ice storage capacity

Counter-height removable air- or water-cooled ice machine with up to 425 lb (193.0 kg) daily production of Chewblet ice

- modular ice machine slides out from behind lower front panel
- soft, chewable, compressed nugget ice is preferred over cubes¹ and is ideal for patient care
- Quiet Night[™] sleep mode turns off ice machine when idle

Designed with sanitation in mind

- automatic self-flushing of ice machine removes impurities
- drain cup provides internal air gap for added protection of food zone components from drain line contaminants
- Agion^{*} silver-based antimicrobial provides protection of key ice and water contact components²
- one-hand lever or SensorSAFE infrared ice dispense

Dependable design, easy to service and clean

- cleaning and sanitizing of entire machine takes only 1 hour
- LED control board provides at-a-glance machine status
- panels are easily removed for accessibility to all components
- ice machine parts are common across all Symphony Plus dispensers
- stainless steel evaporator and auger deliver long life

Environmentally responsible

- meets Consortium for Energy Efficiency Tier 2 specifications
- R404a refrigerant has zero ozone depletion potential
- continuous ice making process uses less electricity and water

Durable, attractive dispenser

- stainless steel cabinet with accent trim
- poly drain pan, grille and dispenser lid are corrosion-resistant
- secured top lid

Easy installation

- comes fully assembled and installs with three easy connections – electric, water and drain

Warranty

- 3 years parts and labor, 5 years compressor parts

Accessories

- Base stand with or without factory installed water filter (refer to form# 7010)
- 4.00" (10.16 cm) leg kit (item# 00188417)
- Pressurized water sanitizing kits (refer to form# 6830)
- SafeCLEAN Plus[™] ice machine cleaner, 1 x 8 oz (237 ml) bottle (item# 01147826)
- Nu-Calgon IMS-III sanitizer, 16 oz (0,5 L) bottle (item# 00979674) Additional filters (refer to form# 9905)
- Additional Symphony Plus accessories (refer to price list)






801-486-3714 | www.goldcupservices.com

Specification

Ice storage capacity 25 Series - 25 lb (11.4 kg) 50 Series - 50 lb (22.7 kg) W1 Width, dispenser 21.00" (53.3 cm) W2 Width, base stand accessory 22.75" (57.8 cm) D1 Depth, entire dispenser 24.00" (61.0 cm) D2 Depth, drain pan 7.00" (17.78 cm) D3 Depth, base stand accessory 24.38" (61.9 cm) H1 Height 25 Series - 36.00" (91.4 cm) 50 Series - 40.00" (101.6 cm) H2 Dispense height clearance 10.50" (26.7 cm) H3 Height, base stand 33.00" (83.8 cm) Ventilation clearance air-cooled models only - 3.00" (7.62 cm) all sides Service clearance air-cooled models - 12.00" (30.5 cm) top, 6.00" (15.24 cm) left side water-cooled units - 12.00" (30.5 cm) top Utility connection location through back or bottom C1 115 V/60/1 electrical 11 amps, 0.8 kW 7' (2.1 m) cord, NEMA 5-15 90° hospital-grade plug 3/8" FPT C2 Potable water inlet C3 Drain 3/4" MPT Water-cooled model connections C4 condenser inlet 3/8" FPT C5 condenser drain 3/8" FPT Heat rejection air-cooled models - 5000 BTU/hr water-cooled models - 1400 BTU/hr to air, 3600 BTU/hr to water Water flow requirement for 0.25 gpm (0.95 lpm) at 50 F (10 C) water-cooled models 0.5 gpm (1.90 lpm) at 70 F (21 C) 1.25 gpm (4.73 lpm) at 90 F (32 C) Air temperature 50 - 100 F (10 - 38 C) Water temperature 45 - 90 F (7 - 32 C) Potable water pressure 10 - 70 psi (69 - 483 kpa) 10 - 125 psi (69 - 861 kpa) Condenser water pressure Approximate ship weight 226 lb (103 kg) Approximate ship weight, 110 lb (50 kg) base stand accessory NOTE: For indoor use only

SHORT FORM SPECIFICATION: (Choose one) ___ lce and water or ___ ice-only dispenser to be Follett* automatic load in countertop configuration, with ___ 25 lb (11.4 kg) or ___ 50 lb (22.7 kg) of storage. Environmentally responsible R404a ice machine (choose one) ___ air- or ___ water-cooled and to be removable for cleaning and maintenance. Ice machine to produce approximately 425 lb (193.0 kg) of Chewblet compressed nugget ice at air temperature of 70 F (21 C), water temperature of 50 F (10 C). Ice machine equipped with automatic self-flushing and Quiet Night sleep mode. Dispenser to have automatic bin level control to start and stop ice machine. Storage area insulated with non-CFC, high density, foamed-in-place polyurethane. 7' (2.1 m) cord and NEMA 5-15 90° hospital-grade plug provided. NSF and ETL listed.

Dimensional drawing

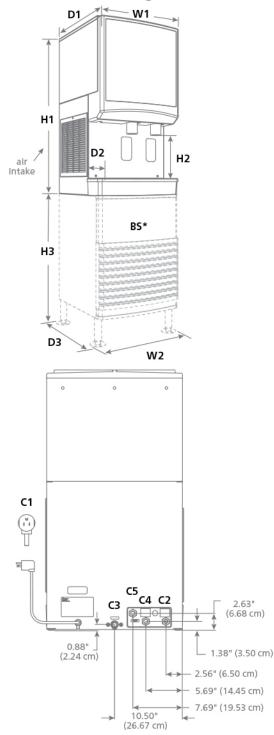

BS*– Base stand sold separately; measurements shown are with base stand legs at lowest position.

See dispenser detail sheet, form# 6675, for counter cut outs.

¹ Independent third party studies. Contact Follett for details.

² Disclaimer: Antimicrobial protection is limited to the treated components and does not treat water or ice. Agion is a registered trademark of Sciessent LLC.

Symphony Plus, SensorSAFE, SafeCLEAN and Quiet Night are trademarks of Follett LLC.

Chewblet and Follett are registered trademarks of Follett LLC, registered in the US. Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.





25/50 CI series countertop

Form #6630 12/17 © Follett LLC



801-486-3714 | www.goldcupservices.com